

Calgary Warehouse
CWE
Equipment Ltd.



DOCK EQUIPMENT

DOCK EQUIPMENT & ACCESSORIES

TRAILER STABILIZING JACK

- Keeps tractorless trailers level while being loaded or unloaded
- Prevents accidents if wheel support collapses
- Stabilizes vehicle against load shifts
- Lowered height: 39 1/2"
- Raised height: 51"
- Removeable 37 1/2" positioning and ratcheting handle
- 8" diameter support pad
- 8" wheels
- 100,000-lb. supporting capacity each and 40,000-lb. lifting capacity
- Recommended use in pairs
- 1-year warranty

Model No. KH777



AUTO STAND TRAILER STABILIZING JACK

- Heavy gauge steel construction
- Large base pad (17" x 18 1/2")
- Gas activated, self levelling system
- 10" diameter semi-pneumatic rubber tires for easy handling
- 41"-50 1/2" height range
- Large trailer contact pad
- Capacity: 100,000 lbs.
- 1-year warranty

Model No. KH791



MOULDED DOCK BUMPERS

- Protects building and dock areas
- Shockproof, tear and freeze resistant
- Use models with 2" steel backup frame for added protection



Model No.	Type	Face Size W" x H"	Overall Projection"	Wt. lbs.
KH005	Rectangular	13 x 10	4	16
KH009	Rectangular	18 x 10	4	32
KH007	Rectangular c/w frame	13 x 10	6	46
KH010	Rectangular c/w frame	18 x 10	6	92

PALLET PULLER

- Efficient way to unload pallets from trucks
- Hardened teeth give positive grip in any pallet
- One person operation
- Pulls pallets straight or sideways to get out of tight spots
- Capacity: 4400 lbs.



Model No.	Description	Wt. lbs
KH843	Pallet Puller	16
ML319	20' Hook and Chain	5

OPTIONAL 20' HOOK AND CHAIN



CARGO BAR & HOOPS

- Prevent cargo from shifting and damage
- No permanent installation or adaptation required
- Quick installation and removal
- Replace expensive shoring or bulkheads
- One piece cargo bar is all aluminum 1 1/2" square 14-gauge tubing that will not bend or give
- Easy-to-operate mechanical ratchet will not slip or vibrate loose and works well in freezing and wet conditions
- 4" square rubber protected end pads keep bar in place
- Adjusts from 89" to 105"
- Cargo hoops are constructed from galvanised steel and measures 24" W x 29" L
- Expands the retention area to secure a large area of smaller boxes or cartons
- Installation hardware is included
- Hoops come in pairs

One piece Cargo Bar adjusts from 89" to 105" long



Model No.	Description	Wt. lbs.
KH574	Aluminum bar	17
KH575	Hoops (pair)	15

Hoops come complete with installation hardware




EXTRUDED RUBBER DOCK FENDERS

D-4 DOCK FENDERS


- Guard against damaging impact
- Made of age, weather and abrasion-resistant synthetic rubber
- Easy to install and the trim appearance makes them well suited for use on trucks and truck docks
- Half oval shape allows radius to widen upon impact creating better deflection
- Easily installed manually or by power tools
- Hardware is concealed when installation is complete

Note: All given dimensions are nominal and may vary an average of 5% in manufacturing process.

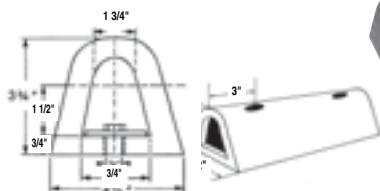

MOUNTING D-4 DOCK FENDERS

- On Wood: Use 1/2" Lag Screws
- On Concrete: Use 1/2" Self-Drilling Fasteners
- On Steel: Weld 1/2" Studs on Centers as Required



In all cases, a drilled metal bar 3/16" x 1 1/2" should be inserted in the bore of the fender to act as a continuous washer.



Diagonal



Horizontal



Vertical

Fender Drilled Model No.	Mounting Drilled Model No.	Dimensions"	Anchor Holes	Approx. Wt. lbs.
KH658	KH662	3 3/4 x 4 1/2 x 12	2 req., 6" *	4
KH659	KH663	3 3/4 x 4 1/2 x 18	2 req., 12" *	6
KH660	KH664	3 3/4 x 4 1/2 x 24	2 req., 18" *	9
KH661	KH665	3 3/4 x 4 1/2 x 36	3 req., 15" *	11

* Between holes

DOCK EQUIPMENT & ACCESSORIES

RUBBER WHEEL CHOCK

- Highly resistant to abrasion, impacts, corrosion, sun, salt, ozone and oil
- Steel ring on back
- 9 1/2" L x 6 1/2" W x 8 1/2" H
- Weight: 11 lbs.

Model No. KH032



IRON WHEEL CHOCKS

- Suited for your toughest jobs

KH799



KH587



KH017

Model No.	Chock Material	Colour	Dimensions			Wt. lbs.		
			L"	x	W"		x	H"
KH799	Ductile Iron	Blue	12	x	8	x	9	19
KH587	Ductile Iron	Safety Yellow	8	x	9 1/8	x	8 1/2	15
KH017	Ductile Iron	Safety Yellow	10 1/2	x	10	x	10 3/4	23

ALUMINUM WHEEL CHOCKS

- High in strength but lightweight
- Resists the effects of oil, salt, corrosion and weather
- Non-sparking


KH023



KH022



KH028



KH031

Model No.	Dimensions			Wt. lbs.		
	L"	x	W"		x	H"
KH023	6	x	7	x	6	4
KH022	7	x	10 3/4	x	8	7
KH031	6	x	9	x	7	4
KH028	8	x	11 1/2	x	9	9

RAIL CHOCKS

- Provides effective means of blocking railcars for safe loading and unloading
- Steel points on chock heads bite into rail to prevent sliding
- Standard finish in yellow
- Integral 7 1/2" x 9 1/2" sign
- Single rail chock for stoppage in one direction; double rail chock for stoppage in both directions
- Choice of exposed (above ground) or flush (level with ground) chocks

KH021



KH016




Model No.	Description	Wt. lbs.
FOR EXPOSED RAIL		
KH016	Single Chock	12
KH021	Double Chock	16
FOR FLUSH RAIL		
KH015	Single Chock	12
KH020	Double Chock	16

WHEEL CHOCK ACCESSORIES

SECURITY CHAIN

- 18 ft. steel chain attaches chock to dock
- Prevents misplacement, theft
- Zinc plated for corrosion resistance
- Diameter: 0.14 (3mm)
- Working load limit: 255 lb (116 kg)
- Comes with hook
- Weight: 4 lbs.

Model No. KH027



CAUTION SIGN

- 10" x 14"
- Black letters on yellow field
- Weight: 6 oz.

Model No. KH030



WHEEL CHOCK WALL BRACKET

- Sturdy grey metal construction
- Fits most sizes of wheel chocks (eg. KH032, KH603)
- Prevents loss of chock

Model No. KH666



URETHANE WHEEL CHOCKS

- Safety orange for greater visibility
- Moulded-in hole through width of chock for attaching chain (sold separately)

Model No. KH024

- For use with trailers
- 7 3/4" W x 11" L x 8" H
- Wt.: 4.5 lbs.

Model No. KH025

- For use with off road vehicles
- 14" W x 17" L x 14" H
- Wt.: 25 lbs.



LAMINATED RUBBER CHOCK

- Designed to fit curvature of tire for a strong grip
- Extra heavy duty laminated rubber and steel construction for use with heavy utility trucks and equipment
- Load capacity: Up to 40,000 lbs.



Model No.	Approx. Dimensions			Wt. lbs.		
	L"	x	W"		x	H"
KH603	8	x	8	x	8	14

RUBBER CHOCKS


Fabricated of a tough rubber compound, reinforced for maximum wearability and strength.

Type A - Patented easy grip handle

may be used with chains

Type B - Traditional eyebolt for sturdy chain connection

KH601




KH600

Model No.	Type	Approx. Dimensions			Wt. lbs.		
		L"	x	W"		x	H"
KH600	A	9	x	8	x	6	10
KH601	B	9	x	8	x	6	10

DOCK EQUIPMENT & ACCESSORIES

DOCK LIGHTS

- The adjustable models allow flexible horizontal and vertical positioning
- 1 1/2" 14-gauge square steel tubing
- Two-piece wall bracket assures secure mounting
- Available with either metal head or polycarbonate head which will not dent, bend or break, and stays cool to the touch
- Comes with wire lamp guard
- PAR-38 lamp not included
- Certified for sale in Canada by an accredited certification body

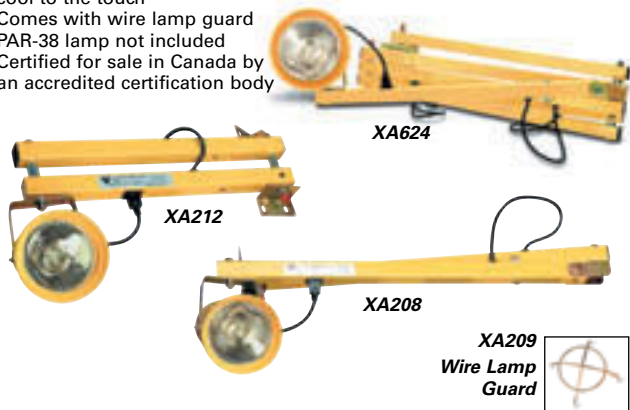

Model No.	Arm Length"	Head Type	Wt. lbs.
ADJUSTABLE SINGLE STRUT			
XA213	40	Metal	16
XA208	60	Metal	21
XC446	40	Polycarbonate	12
XC447	60	Polycarbonate	15

DOUBLE STRUT -HORIZONTAL POSITIONING ONLY			
XA212	24	Metal	16
XA211	40	Metal	18
XA214	60	Metal	23
XA349	90	Metal	35
XC448	24	Polycarbonate	12
XC449	40	Polycarbonate	15
XC450	60	Polycarbonate	19
XC451	90	Polycarbonate	28

ADJUSTABLE DOUBLE STRUT			
XA619	40	Metal	18
XA620	60	Metal	21
XA621	90	Metal	31
XA623	40	Polycarbonate	17
XA624	60	Polycarbonate	20
XA625	90	Polycarbonate	30

ACCESSORIES

Model No.	Description
XA209	Replacement Wire Guard
XB235	Replacement PAR-38 Lamp
XC224	Replacement Metal Head
XC445	Replacement Polycarbonate Head

HALOGEN DOCK LIGHT

- 40" full extension
- Tempered glass lens with protective wire guard
- Light fixture can pivot up and down
- Includes two 500 W quartz halogen bulbs
- Arm has spare bulb holder built in
- Suitable for wet areas
- On/Off toggle switch
- 6' cord with ground
- Certified for sale in Canada by an accredited certification body



Model No.	Description	Wt. lbs.
XA673	40" Length	15
XC464	Replacement bulb	-

HPS DOCK LIGHTS

ENERGY SAVER!

- Double strut construction for horizontal positioning
- Polycarbonate head
- 1 1/2", 14-gauge square steel tubing
- 50 W high pressure sodium lamp and lamp guard included
- Offers a 63% energy savings over 150 W incandescent PAR floodlights
- Certified for sale in Canada by an accredited certification body



Model No.	Description	Wt. lbs.	Model No.	Description	Wt. lbs.
XA615	Extends 24"	14	XA617	Extends 60"	21
XA616	Extends 40"	17	XA618	Extends 90"	29

ACCESSORIES

XB205	50 Watt High Pressure Sodium Bulb
-------	-----------------------------------

WARNING LIGHTS

- Unbreakable polycarbonate outer dome
- 25 W incandescent bulb
- 80 to 90 flashes per minute
- 360° Fresnel lens
- Low current draw, 0.21 amps at 115 VAC
- 6 1/2" high, 5 1/2" diameter
- Excellent for indoor or outdoor industrial traffic control systems




Amber	Model No.		Volts
	Blue	Red	
XA321	XA324	XA325	12
XA193	XA334	XA332	24
XA320	XA331	XA330	36
XA322	XA329	XA333	48

LED STOP & GO LIGHT

Loading dock *Stop & Go* light is a safety signaling device that alerts truck drivers and loading dock personnel to the safety status of docked or docking trucks.



- Simple, reliable and cost-effective warning system that reduces the risk of accidents
- Establishes a clear line of communication between drivers and dock personnel
- Safety yellow polypropylene housing will not rust, pit, dent or corrode
- Shallow depth of unit (less than most dock bumpers) prevents damage to the *Stop & Go* Light
- Integral eyebrow-type sun visors create extended visibility
- Mounting holes conform to standard building specifications
- Units can be used indoors or outdoors
- Dimensions: 6 3/8" W x 3 3/4" D x 11 3/8" H. Lens diameter: 4 1/4"
- Weight: 2 lbs.
- Certified for sale in Canada by an accredited certification body



12 VDC	Model No.		Description
	24 VDC	115 VAC	
XC100	XC101	XC102	Without Flasher or Switch
XC103	XC104	XC105	With Flasher and Switch
XC106	XC107	XC108	Set, including one of each of the above

DOCK EQUIPMENT & ACCESSORIES

MODULAR CABLE AND HOSE PROTECTION SYSTEMS

Benefits:


- Weather and abrasion resistant; high load-bearing capacity
- Insulates electrical cables from human contact
- Makes length-of-run calculations easy
- Increases traction
- Lightweight; easy to transport, set-up, breakdown, and store; multi-length applications
- Allows for moving with ease
- High visibility

Features:


- Polyurethane construction, non-conductive material
- 36" length per lineal protector
- 5 bar tread plate surface
- Safety warning symbols moulded onto lid or ramp
- Modular interlocking design
- Recessed carrying handle
- Universal safety colours

HEAVY-DUTY 2, 3, 4, 5 CHANNEL SYSTEMS

For heavy trucks and forklifts in industrial environments. Colour: Yellow lid/Orange base.



Female end cap



Male end cap

Model No.	Description	A Length"	B Width"	C Height"	D Channel Width"	E Channel Height"	Max Load Lbs. Per Tire	Weight lbs.
KH687	5 Channel Protector	36	20	2 5/16	1 1/4	1 1/4	20150	29
KH688 (Pair only)	5 Channel End Caps (Female)	7 1/2	20	2 5/16	1 1/4	1 1/4		4.7
	5 Channel End Caps (Male)	5 1/4	20	2 5/16	1 1/4	1 1/4		4.7
KH691	4 Channel Protector	36	20	2 5/16	2	1 1/4	20150	29
KH692 (Pair only)	4 Channel End Caps (Female)	7 1/2	20	2 5/16	2	1 1/4		4.7
	4 Channel End Caps (Male)	5 1/4	20	2 5/16	2	1 1/4		4.7
KH695	3 Channel Protector	36	20	3 1/16	2 1/4	2 1/4	14210	36
KH696 (Pair only)	3 Channel End Caps (Female)	8 1/4	20	3 1/16	2 1/4	2 1/4		6.5
	3 Channel End Caps (Male)	6	20	3 1/16	2 1/4	2 1/4		6.5
KH699	2 Channel End Protector	36	22	4 1/8	3 1/4	3 1/4	10880	33




CHECKERS
INDUSTRIAL PRODUCTS, INC.



GENERAL PURPOSE AND LIGHT-DUTY CHANNEL SYSTEMS

For lightweight vehicle and pedestrian traffic. Protects cable and hose lines up to 1 1/4" outside diameter




Female end cap



Male end cap

Model No.	Description	A L"	B W"	C H"	D Channel W"	E Channel H"	Max Load Lbs. Per Tire	Weight lbs.
KH700	5 Channel Protector	36	17 1/2	1 15/16	1 5/16	1 5/16	10500	18
KH701	5 Channel End Caps (Female)	4 3/4	17 1/2	1 15/16	1 5/16	1 5/16		2.2
	(Male)	4 3/4	17 1/2	1 15/16	1 5/16	1 5/16		2.7
KH702	1 Channel Protector	36	11 1/2	1 19/32	1 1/4	-	11700	8



POLYETHYLENE CORNER PROTECTOR

- Ideal for application where corners are exposed
- 2 1/4" wide shock absorbing moulded polyethylene design to provide ample impact protection
- Dimensions: 10" W x 6 1/2" D x 40 1/2"H
- Weight: 3 lbs
- Colour: Safety yellow for high visibility

Model No. KH813

Dixie Poly Drum Corp.



POLYETHYLENE WALL PROTECTOR

- Non-corrosive and ideal for either indoor or outdoor applications
- Mounts to building walls to protect them from scratches and dents
- Overall dimensions: 48" L x 2 1/4" W x 6 1/4" H
- Installation hardware not included
- Weight: 3 lbs.
- Colour: Safety yellow for high visibility
- Includes: 3/8" counter sunk mounting holes and reverse tapered ends to overlap when used with multiple units

Model No. KH812

Dixie Poly Drum Corp.



DOCK EQUIPMENT & ACCESSORIES

POLYETHYLENE BOLLARD COVERS



- Enhance and protect the appearance of your steel bollards
- Reduce maintenance; avoid scraping and painting each spring
- Constructed of 1/8" UV stable polyethylene for durability
- Easy installation with patented *GripperTabs™* included
- Colour: Safety yellow with reflective red tape or high visibility red with white reflective tape, for great visibility day or night
- 5-year guarantee against fading and cracking



Yellow Model No	Red Model No.	Fits Bollard Diameter"	Fits Bollard Length"	Wt. lbs.
KH806	KH836	4	52	7
KH807	KH837	4	60	8
KH808	KH838	4	64	9
KH809	KH839	6	52	8
KH810	KH840	6	60	9
KH811	KH841	6	72	10

ALUMINUM DOCKPLATES

Skid resistant safety tread deck. Bevelled edges allow smooth access from either end. Bend at upper end permits both ends of plate to lie flat. Steel legs fit between dock and truck; prevent movement when in use. High tensile aluminum alloy construction; no welds to break. **FOB Weston, ON.**

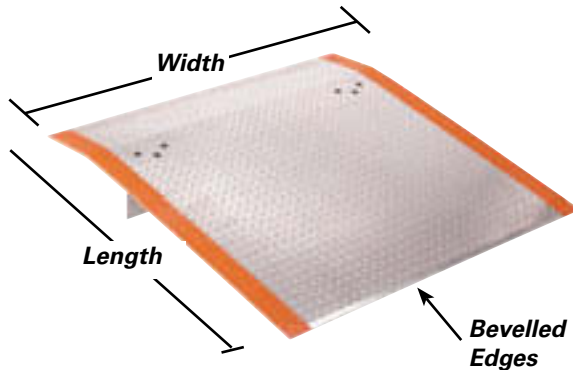

HOW TO ORDER:

1. **SELECT DOCKPLATE WIDTH;**
add 12" to width of equipment to be used on dockplate.
2. **DETERMINE HEIGHT DIFFERENTIAL;**
the vertical distance from dock floor to truck floor. The height differential decides the necessary plate length.
3. **SELECT THE NECESSARY CAPACITY.**

Size W"x L" Diff."	Height No.	LIGHT-DUTY - 1/4" GA.			REGULAR-DUTY - 3/8" GA.			HEAVY-DUTY - 1/2" GA.			EXTRA-HEAVY DUTY - 5/8" GA.		
		Model lbs.	Cap. lbs.	Wt. No.	Model lbs.	Cap. lbs.	Wt. No.	Model lbs.	Cap. lbs.	Wt. No.	Model lbs.	Cap. lbs.	Wt. No.
36 x 48	7	KH206	700	53	KH148	1700	71	KH193	3000	97			
42 x 48	7	KH207	800	60	KH153	2000	82	KH194	3500	110			
48 x 24	3	KH208	1800	36	KH154	4500	48						
48 x 30	4	KH209	1450	44	KH155	3600	60						
48 x 36	5	KH210	1250	52	KH156	3000	70	KH195	5400	94			
48 x 42	6	KH211	1050	60	KH157	2600	82	KH196	4600	110			
48 x 48	7	KH212	900	67	KH158	2200	92	KH197	4000	124			
48 x 54	8	KH213	760	76									
48 x 60	9	KH214	600	83	KH159	1500	114	KH198	2700	155			
48 x 72	11	KH215	400	100	KH160	1100	136	KH199	2000	184			
60 x 24	3	KH216	2200	43	KH170	5600	59	KH200	10000	79	KH328	15600	98
60 x 30	4	KH217	1800	54									
60 x 36	5	KH218	1500	63	KH171	3700	86	KH201	6700	114	KH329	10500	141
60 x 42	6	KH219	1300	73									
60 x 48	7	KH220	1100	83	KH172	2800	113	KH202	5000	151	KH330	7800	186
60 x 60	9	KH221	880	102	KH173	2200	140						
72 x 24	3	KH222	2600	51	KH174	6700	76	KH203	12000	94	KH331	18700	115
72 x 30	4	KH223	1950	63									
72 x 36	5	KH224	1650	74	KH175	4500	105	KH204	8000	135	KH332	12600	166
72 x 48	7	KH225	1300	97	KH176	3300	135	KH205	6000	178	KH333	9400	220
72 x 60	9	KH226	900	121w									

All dockplates are made to order (non-returnable)

DOCK EQUIPMENT & ACCESSORIES

ALUMINUM DOCKBOARDS

- For truck or rail applications
- Curb design adds strength and prevents equipment run-off
- Skid resistant safety tread deck
- Bevelled edges for smooth access from either end
- Bend at upper end permits both ends of plate to lie flat
- Steel legs fit between dock and truck or railcar, prevent movement when in use
- High tensile aluminum alloy construction

Model No.	Cap. lbs.	Inside Curbs"	Width Overall"	Length"	Height Diff."	Wt. lbs.
KH149	4000	51	54	60	9	164
KH150	4000	51	54	72	11	210
KH151	4000	57	60	60	9	177
KH152	4000	57	60	72	11	225
KH161	6000	51	54	48	7	143
KH162	6000	50	54	60	9	177
KH163	6000	50	54	72	11	225
KH164	6000	57	60	48	7	153
KH165	6000	56	60	72	11	240
KH166	6000	63	66	36	5	123
KH167	6000	63	66	48	7	163
KH168	6000	62	66	60	9	203
KH169	6000	69	72	48	7	174
KH177	8000	51	54	36	5	106
KH178	8000	50	54	48	7	149
KH179	8000	50	54	60	9	188
KH180	8000	50	54	72	11	236
KH181	8000	57	60	36	5	115
KH182	8000	56	60	48	7	160
KH183	8000	56	60	60	9	201
KH184	8000	56	60	72	11	251
KH185	8000	69	72	30	4	110
KH186	8000	68	72	48	7	181
KH187	8000	68	72	60	9	227
KH188	8000	68	72	72	11	282
KH189	8000	68	72	84	13	340
KH105	10000	51	54	36	5	127
KH106	10000	50	54	48	7	176
KH107	10000	50	54	60	9	222
KH108	10000	50	54	72	11	276
KH109	10000	56	60	60	9	239
KH110	10000	56	60	72	11	297
KH111	10000	63	66	36	5	148
KH112	10000	62	66	48	7	197
KH113	10000	62	66	60	9	256
KH115	10000	69	72	48	7	210
KH116	10000	68	72	60	9	273
KH117	10000	68	72	72	11	337
KH118	10000	68	72	84	13	403
KH119	12000	57	60	36	5	137
KH120	12000	56	60	48	7	190
KH121	12000	56	60	60	9	249
KH122	12000	69	72	36	5	158
KH123	12000	68	72	48	7	217
KH125	12000	68	72	84	13	192
KH126	14000	56	60	36	5	143
KH127	14000	56	60	48	7	190
KH128	14000	56	60	60	9	249
KH129	14000	56	60	72	11	313
KH130	14000	62	66	36	5	148
KH131	14000	62	66	48	7	204
KH132	14000	62	66	60	9	266
KH133	14000	62	66	72	11	333
KH134	14000	68	72	36	5	160
KH135	14000	68	72	48	7	220
KH136	14000	68	72	60	9	283
KH137	14000	68	72	72	11	353
KH138	14000	68	72	84	13	456
KH139	16000	68	72	60	9	330
KH140	16000	68	72	72	11	412
KH141	16000	68	72	84	13	540
KH142	18000	69	72	36	5	187
KH143	20000	68	72	36	5	187
KH144	20000	68	72	48	7	267
KH145	20000	68	72	60	9	344
KH146	20000	68	72	72	11	412
KH147	20000	67	72	84	13	564

• FOB Weston, ON.

All dockboards are made to order (non-returnable)



OPTIONS:

RAIL DOCKBOARDS

Fixed Spanlocks

- Provide quick and safe access between dock and railcar, or between railcars
- Sold in pairs

Model No. KH192

Adjustable Spanlocks

- Permit use of same board on truck or rail docks
- Easily adjusted for various spans
- Sold in pairs

Model No. KH190

FORKLIFT HANDLES

- Makes movement of heavy boards and plates easy and safe
- Recommended for boards and plates over 140 lbs
- Sold in pairs
- Must be factory installed

Model No. KH191

HOW TO ORDER:

1. Determine required capacity:


- 90% of gross weight for forklift trucks;
- 67% of gross weight for powered pallet trucks

Example:

Wt. of Forklift + Wt. of Heaviest Load =
Gross Weight x .90 = Required Capacity
5500 lbs. + 10,000 lbs. = 15,500 x .90 = 13,950 lbs.

2. Select dockboard width: add 12" to width of equipment to be used on dockboard.

3. Determine height differential: the vertical distance from dock floor to truck floor.

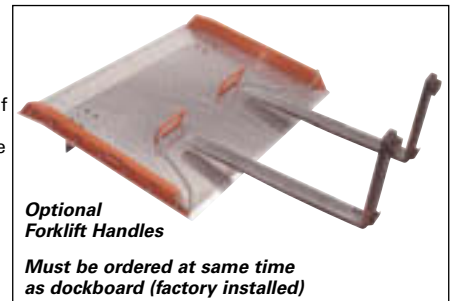

Optional Forklift Handles


Must be ordered at same time as dockboard (factory installed)

DOCKBOARD/RAMP COMBINATION

For a height differential exceeding 11", use a ramp in combination with dockboard. Each board can be converted to an equivalent-size ramp. Call us with your requirements.

ALUMINUM WHEEL RISERS

- Ideal for use when the loading dock is higher than the trailer bed
- Levels out trailer with dock
- Facilitates loading and unloading
- 24" wide
- 25,000 lbs. capacity per pair



Model No.	Deck Height"	Deck Length"	Approach Length"	Overall Length"	Wt. lbs. per pair
KH061	6	24	21	45	124
KH062	8	24	28	52	150
KH064	10	24	35	59	178
KH066	12	24	42	66	210
KH063	6	36	21	57	164
KH065	8	36	28	64	194
KH068	10	36	35	71	226
KH070	12	36	42	78	263
KH067	6	48	21	69	204
KH069	8	48	28	76	238
KH071	10	48	35	83	274
KH072	12	48	42	90	316

• FOB Weston, ON. All dockplates are made to order (non-returnable)